



HWA-SON
華商電子

壁掛/吸頂式揚聲器

符合緊急廣播設備用揚聲器型式認可基準規範



(四方型)

BO-401A



(圓型)



PG-501LC



(8英吋吸頂專用)



BO-403L/BO-403L1
BO-403L1T(雙音路)

PG-807LC/PG-807LC1
PG-807LC1T(雙音路)

BO-600L/BO-600L1
BO-600L1T(雙音路)

型號	額定功率 W	阻抗Ω	額定頻寬	音壓	材質/顏色	單體	尺寸 mm
BO-401A	3/5W	3.3/2K	200~10KHZ	≥94dB	ABS/四方	4 吋	170*170*56(方)
ABS/圓型					Φ170*47(圓)		
PG-501LC					鐵製/白色	190*190*80	
BO-401L							(96+60)*210*243
BO-403L							(96+60)*210*243
PG-807LC			100~12KHZ	≥96dB		8 吋	93*260
BO-600L					ABS/白色		110*225*295
BO-403L1	1/3/6W	10/3.3/1.7K	100~18KHZ	≥100dB	鐵製/白色	8 吋	(96+60)*210*243
PG-807LC1					ABS/白色		93*260
BO-600L1							
BO-403L1T	1/3/6W	10/3.3/1.7K	100~16KHZ	≥101dB	鐵製/白色	8 吋	(96+60)*210*243
PG-807LC1T					ABS/白色		93*260
BO-600L1T							



創新 / 專業 / 品質 / 服務

2020.7



HWA-SON
華商電子

嵌入/嵌頂式揚聲器

符合緊急廣播設備用揚聲器型式認可基準規範



(鐵製品-夾式)

PG-501L




(ABS品-夾式-白色)




(螺絲固定式)

PG-802L/PG-802L1

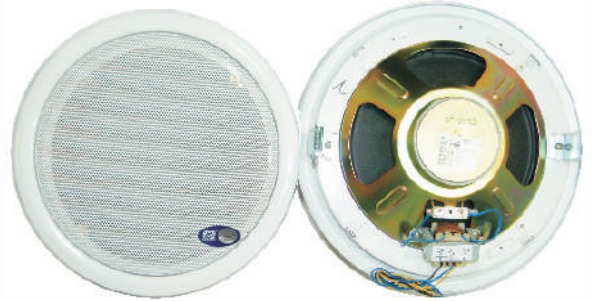

(鐵製品-夾式)

PG-807L/PG-807L1/
PG-807L1T(雙音路)

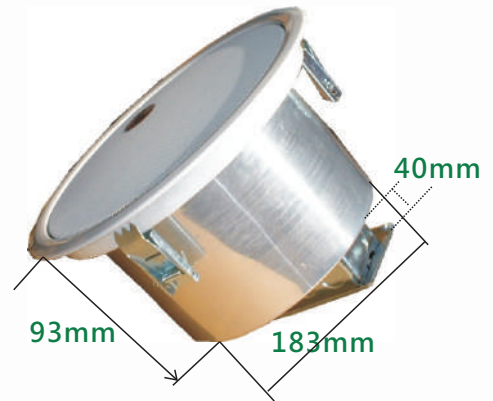

PG-8D鋁質(防火/防塵)背罩---可外加
單聯接線BOX盒---可外加
依天花板高度可選擇(有無BOX盒)

尺寸：φ183x93(H),mm

型號	額定功率 W	阻抗Ω	額定頻寬	音壓	材質/顏色	單體	面板直徑 mm	施工孔徑 mm
PG-501L	3/5W	3.3/2K	200~10KHZ	≥95dB	鐵製/白色	4 吋	60*185	165
ABS/白色					60*185		145	
PG-807L			100~12KHZ	≥99dB	鐵製/白色	8 吋	80*260	240
PG-802L					ABS/白色		80*280	220
PG-807L1	1/3/6W	10/3.3/1.7K	100~18KHZ	≥100dB	鐵製/白色	8 吋	80*260	240
PG-802L1					ABS/白色		80*280	220
PG-807L1T	1/3/6W	10/3.3/1.7K	100~16KHZ	≥101dB	鐵製/白色	8 吋 二音路	80*260	240



創新 / 專業 / 品質 / 服務

2020.7



HWA-SON

華商電子

壁掛/吸頂式揚聲器

符合緊急廣播設備用揚聲器型式認可基準規範



(TD0602MD)

(防爆安全標示)



(防爆檢定標示)



防爆喇叭



(勞動部職安署登錄)

HS-15EX

(一體成形/內置變壓器)鋁合金IP66



消防個認品



CAD20T

(一體成形/內置變壓器)IP66

TH-25FT

(一體成形/內置變壓器)IP66

型號	TH-25FT	CAD20T	HS-15EX
品名	號角喇叭	高效能投射型喇叭	耐壓防爆號角喇叭
工研院檢定合格號	X	X	(ITRI)2017 第 07-00121X
型式認可編號	EP-A9801	EP-A9903	EP-A10201
額定功率 W	10/15/25/30W	2.5/5/10/20W	1/2/4/8/15W
阻抗Ω	1K/667/400/333Ω	4K/2K/1K/500Ω	10K/5K/2.5K/1.25/666Ω
頻率響應範圍	20~20KHZ		
額定頻寬範圍	500~4.6KHZ	90~20KHZ	400~4KHZ
音壓	≥116dB	≥105dB	≥112dB
音壓位準等級	L 級		
材質/顏色	鋁製/灰色	ABS/白色	塑鋼+鋁合金/黑色
單體	8 英吋	5 英吋	8 英吋
型式總類	號角型	圓錐型	號角型
尺寸 mm	Φ200*75*255	Φ138*200	Φ174*113*265
防水等級	IP66	IP66	IP66
安裝方式	壁掛/吸頂		
產地	台灣		
防氣爆+防塵爆(等級)	X	X	Ex d IIB+H2 T6 Gb ; Ex tD A21 IP66 T85°C
108.3.1 起·對於粉塵環境用電機設備之型式-參照國際標準 IEC60079 系列規定標示			Ex d IIB+H2 T6 Gb ; Ex tD IIIC IP66 T85°C
接線孔徑	1/2 防水接頭	1/2 防水接頭	PF 1/2(平行螺紋 4 分)



創新 / 專業 / 品質 / 服務

2020.7