



HWA-SON
華商電子

壁掛/吸頂式揚聲器


符合緊急廣播設備用揚聲器型式認可基準規範

HS-15EX

(防爆安全標示)



(TD0602MD)

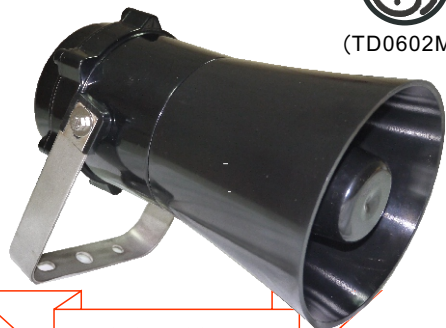

防爆喇叭

TH-30FTM



指向特性區分：N

CAD20T



Ip66

| 型號 | 額定功率 W | 阻抗(Ω) | 額定頻寬 | 音壓 | 材質/顏色 | 單體 | 尺寸(mm) |
|----------|--------------|-----------------------|-----------|--------|----------------|----------|----------------|
| HS-15EX | 1/2/4/8/15W | 10K/5K/2.5K/1.25K/667 | 400~4KHZ | ≥112dB | 鋁合金 塑鋼(黑/紅) | 8吋 號角 | Φ174*265 |
| TH-30FTM | 10/15/25/30W | 1K/667/400/333 | 300~12KHZ | ≥117dB | ABS/白色 | 8吋 號角 | Φ(160+220)*232 |
| CAD20T | 2.5/5/10/20W | 4K/2K/1K/500 | 20~20KHZ | ≥105dB | ABS/白色 | 5吋 | Φ138*200 |

嵌頂/嵌頂式揚聲器

PG-501L



(ABS品夾式)

BO-401A



ABS(圓形)壁掛/吸頂-兩用

TH-25FT

(一體成形/內置變壓器)



Ip66

| 型號 | 額定功率(W) | 阻抗(Ω) | 額定頻寬 | 音壓 | 材質/顏色 | 單體 | 面板直徑 mm | 施工孔徑 mm |
|---------|--------------|----------------|------------|--------|--------|------|---------------|------------|
| PG-501L | 3/5W | 3.3/2K | 200~10KHZ | ≥95dB | ABS/白色 | 4吋 | Φ185*60 | 145 |
| BO-401A | | | | | | | Φ180*55(圓型) | |
| TH-25FT | 10/15/25/30W | 1K/667/400/333 | 500~4.6KHZ | ≥116dB | 鋁製/灰色 | 8吋號角 | 尺寸Φ200*75*255 | |



創新 / 專業 / 品質



2022.08

